



## DATASHEET

# UWB/BLE COMBO ANTENNA PART NUMBER 903-001-002

## UWB/BLE COMBO ANTENNA

### FEATURES

- UWB (Ultra Wide Band) Antenna
- BLE (Bluetooth Low Energy) Antenna
- Omnidirectional Radiation Pattern
- UWB: 6.0–8.5 GHz (Channels 5,6,8,9)
- Channels: 5, 6, 8, 9
- BLE: 2.4–2.5 GHz
- Application: UWB Ranging, UWB Angle of Arrival, BLE
- SMT Compatible

## UWB/BLE COMBO ANTENNA | PART NUMBER 903-001-002

### TECHNICAL DATA

Dimensions	9.35 x 16.10 x 10.00 mm <sup>3</sup>
Pad Configuration	Pad 1 = Feed UWB; Pad 2 = Feed BLE; Pad 3 / 4 = GND
Material	Brass (metal), LCP (resin)
Temperature Range	-40 to +105 °C
Manufacturing Process	SMT Placeable (Tape & Reel)

ELECTRICAL	BLE	CHANNEL 5	CHANNEL 9
<b>Frequency Range</b>	2.40 to 2.50 GHz	6.24 to 6.74 GHz	7.73 to 8.24 GHz
<b>Return Loss S11</b>	< -7 dB	< -10 dB	< -10 dB
<b>Efficiency</b>	> -2.5 dB	> -2.0 dB	> -2.0 dB
<b>Peak Gain</b>	2 dBi	5 dBi	5.5 dBi
<b>Radiation Properties</b>	Omnidirectional		
<b>Polarization</b>	Linear Vertical		
<b>Impedance</b>	50 Ohm		
<b>Max. Input Power</b>	10 W		


Notes:

1. Performance data on 60x85 mm<sup>2</sup> eval ground plane.
2. Reference plane for measurement is the connector.


## UWB/BLE COMBO ANTENNA | PART NUMBER 903-001-002

### ANTENNA DIMENSIONS

#### Pad Position

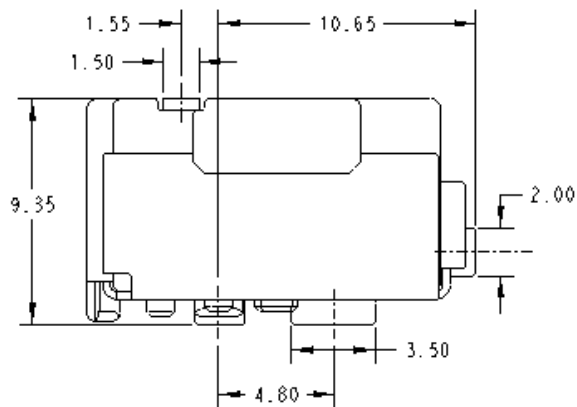

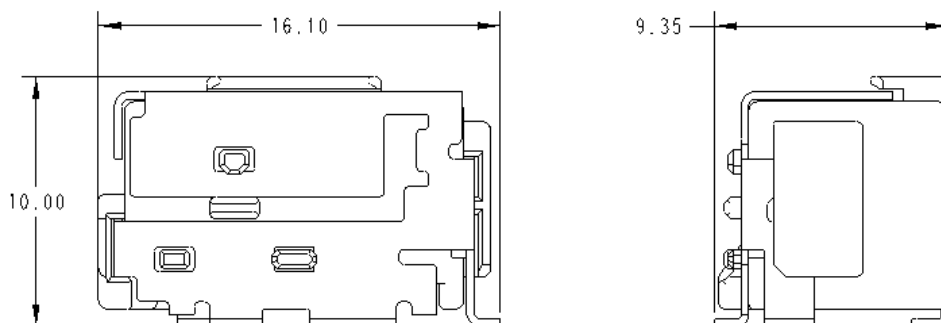


#### Outline




## UWB/BLE COMBO ANTENNA | PART NUMBER 903-001-002


### ANTENNA LAND PATTERN

PAD	DESCRIPTION
<b>P1</b>	UWB Feed Pad
<b>P2</b>	BLE Feed Pad
<b>P3</b>	Ground Pad
<b>P4</b>	Ground Pad

	Copper Keep-out Area
	Antenna Copper Area
	50 Ohm Transmission Line All other areas to be GND

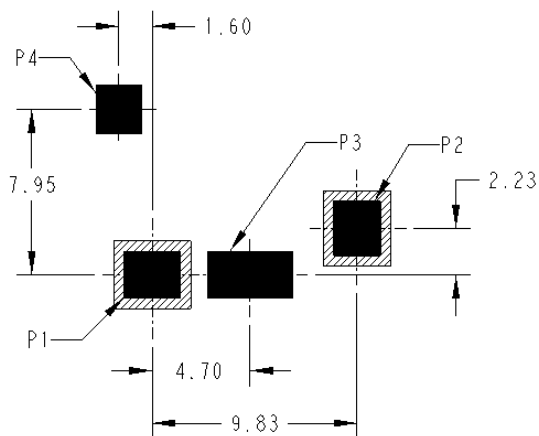

Dimensions referenced to P1 center.

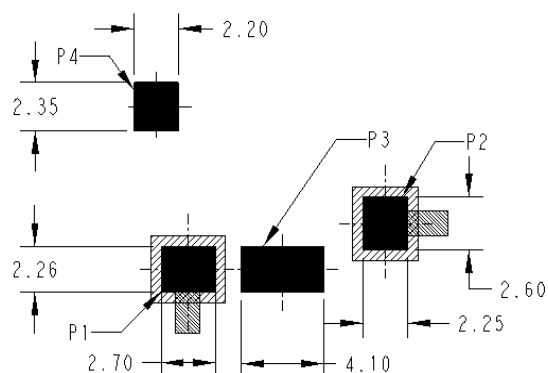

Copper keep-out area width around P1 and P2 is 0.5mm.

## UWB/BLE COMBO ANTENNA | PART NUMBER 903-001-002

### FEEDING PAD

Excessive capacitive loading of the feeding pad can degrade the achievable matching and impedance bandwidth of the antenna. The pad capacitance is controlled by the pad clearance to the coplanar ground plane on the top layer and the distance to lower ground layer(s).

- The recommended clearance around the pad is 0.5 mm for the recommended pad dimensions of 1.6 x 2.0 mm<sup>2</sup>.
- The vertical spacing between pad and continuous ground planes should be  $\geq 0.8$  mm for optimum performance ( $\geq 0.6$  mm for acceptable matching on sufficient ground plane sizes).

For **two-layer PCBs** of typical thickness (1.0 mm to 1.6 mm) the bottom ground layer can be continuous underneath the antenna pad. In case of thinner PCBs a recessed bottom ground plane can be used (see four-layer PCB).

For **four-layer PCBs** with inner layers closer than 0.6/0.8 mm to the top layer the capacitance can be reduced by opening the inner ground layers underneath the antenna feeding pad. A rectangular recess of 2.8 x 3.2 mm (aligned and centered to the patch) is recommended for all ground layers within 0.8 mm vertical distance to the top layer.

The recommended layout for 4-layer PCBs with a total thickness above 0.8 mm is shown in Fig. 1. The closed bottom ground plane assures backside shielding.

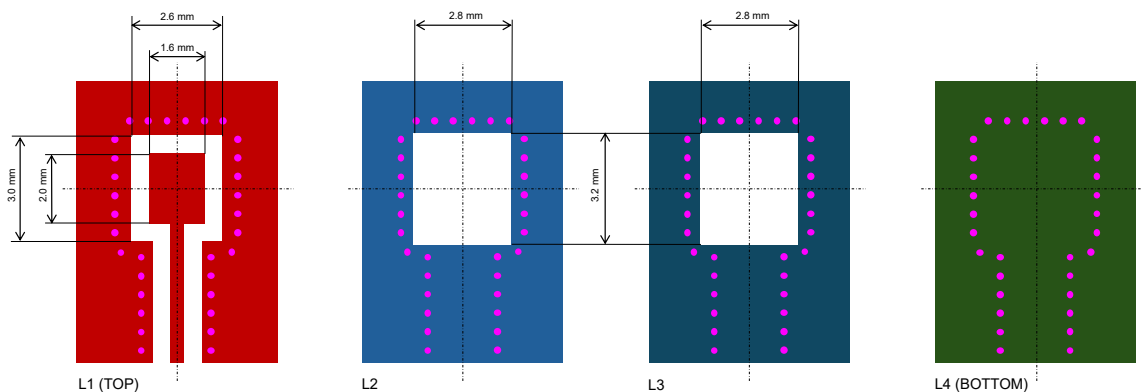


Fig. 1: Layout recommendation for the feeding pad on a 4-layer PCB with a total thickness above 0.8 mm (violet dots = dense via fence along RF feeding line and around antenna feeding pad).


If the spacing between L1 and L3 is  $\geq 0.8$  mm the ground opening on L3 is optional and can be closed if required.

For thin PCBs with a total thickness below 0.8 mm the bottom ground shall be recessed as well (opening identical to L2 and L3).

## UWB/BLE COMBO ANTENNA | PART NUMBER 903-001-002


### ANTENNA LAND PATTERN

LOCATION	DIMENSION FROM PCB OUTLINE [MM]
<b>A</b>	16 mm min.
<b>B</b>	16 mm min.
<b>C</b>	21 mm min.

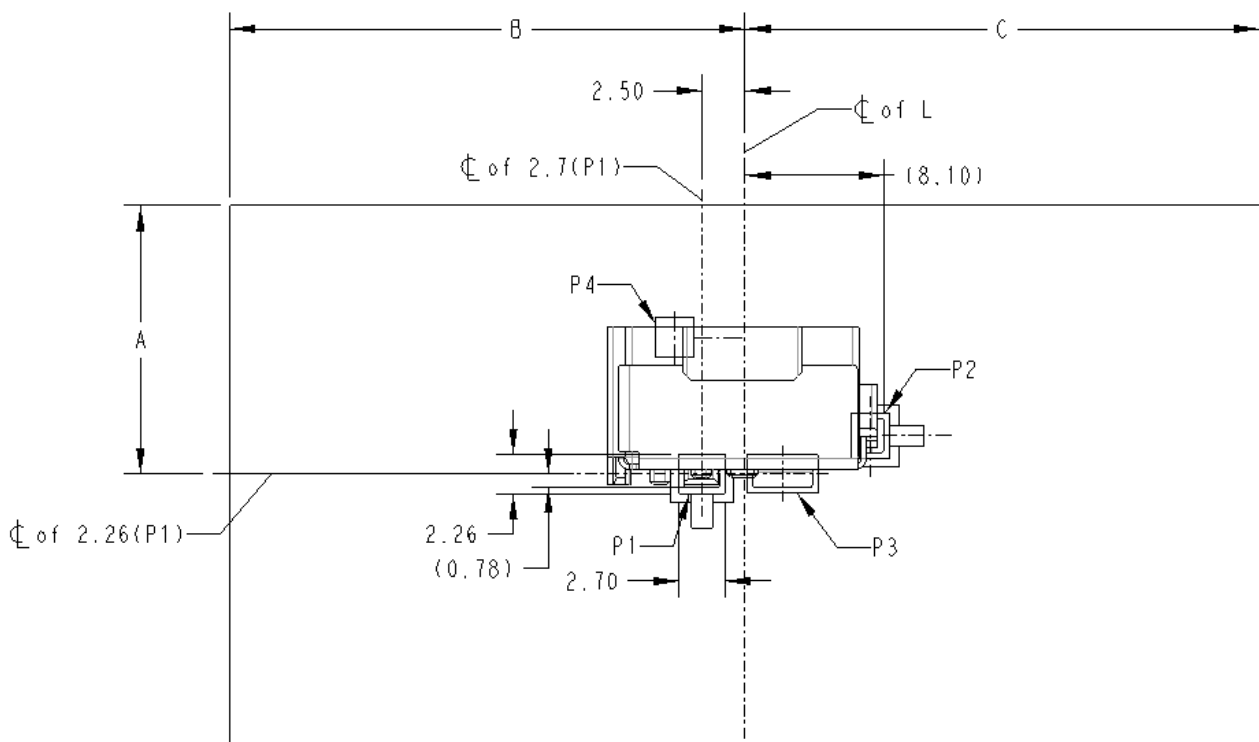


## UWB/BLE COMBO ANTENNA | PART NUMBER 903-001-002

### EVAL-BOARD

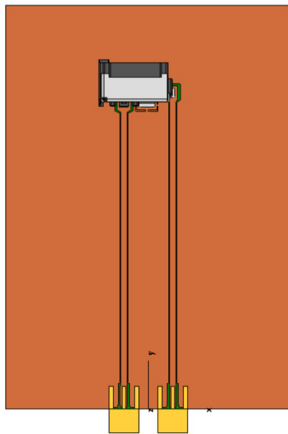

.dxf files available

UWB Standalone  
Eval-Board  
60 x 85mm<sup>2</sup>

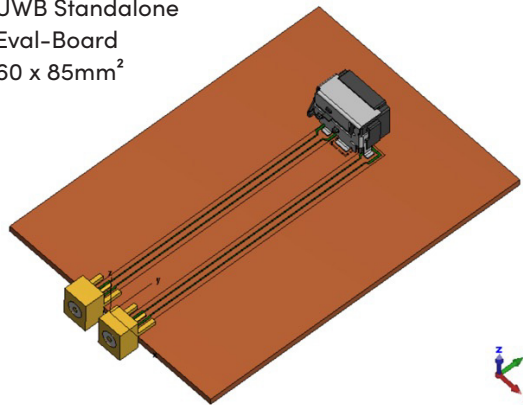


Recommended Connector: Linx CONSMA013.062

### Simulation Model



### Measurement Setup


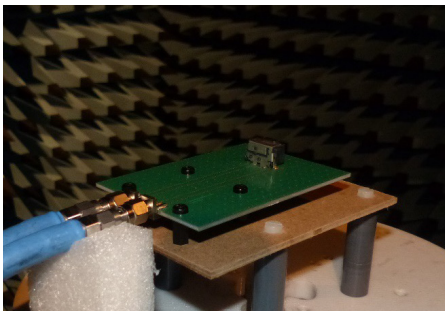


Reference plane for simulation and measurement is the connector. Therefore, the insertion loss of the SMA connector and the microstrip line is included in the results (0.6 dB @ 2400 MHz, 1.3-1.8 dB @ 6000-9500 MHz).

## UWB/BLE COMBO ANTENNA | PART NUMBER 903-001-002

### RETURN LOSS S11 AND COUPLING S21 (MEASURED)

UWB/BLE Combo Antenna @ Eval-Board

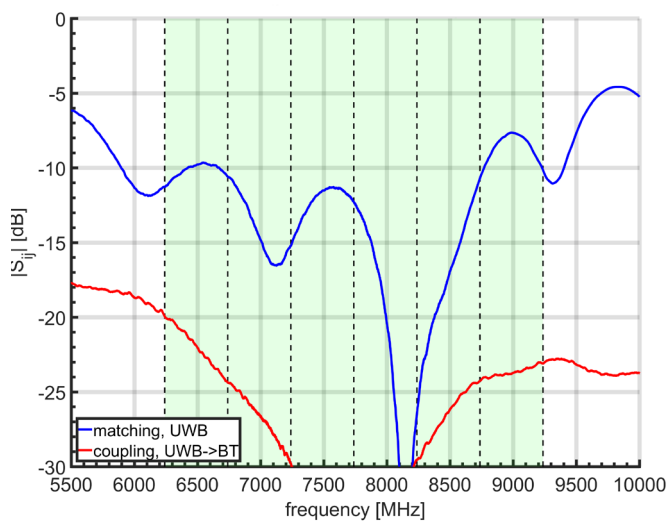
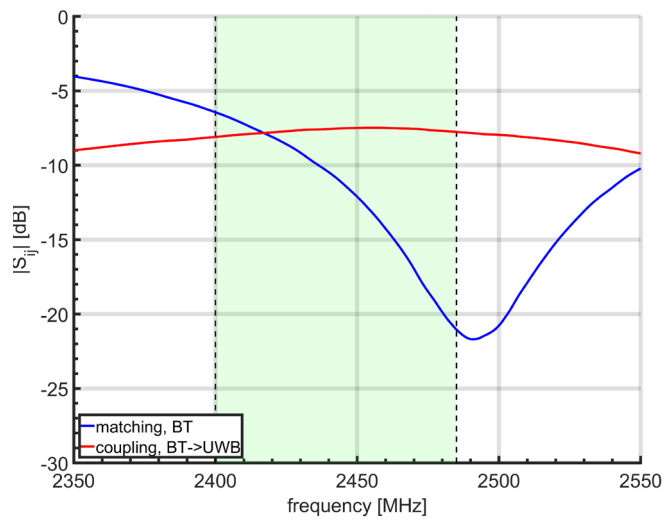




## UWB/BLE COMBO ANTENNA | PART NUMBER 903-001-002

### EFFICIENCY (MEASURED)



UWB/BLE Combo Antenna @ Eval-Board

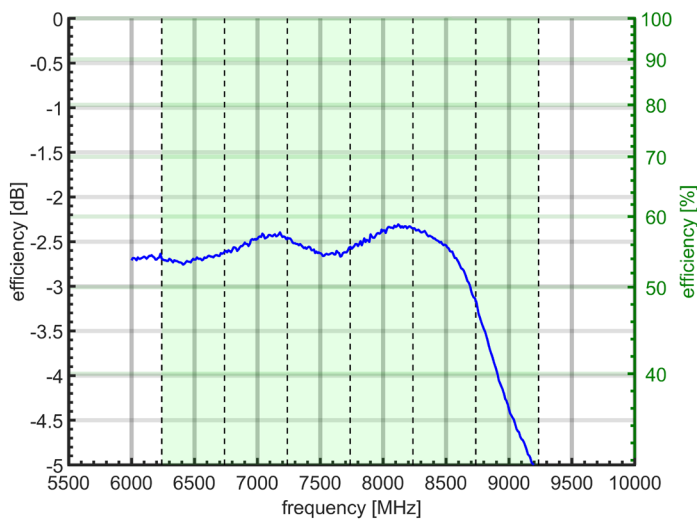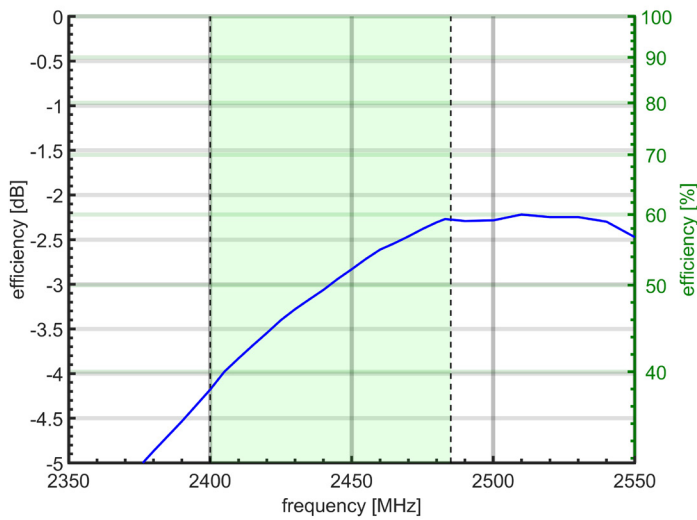

## UWB/BLE COMBO ANTENNA | PART NUMBER 903-001-002

### PEAK GAIN (MEASURED)


UWB/BLE Combo Antenna @ Eval-Board

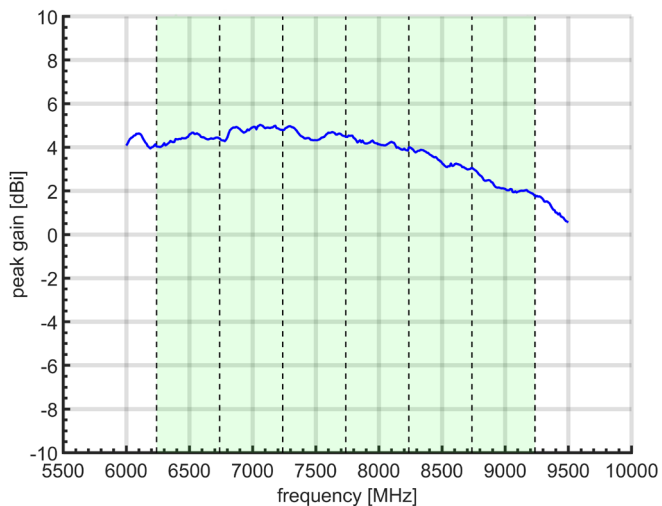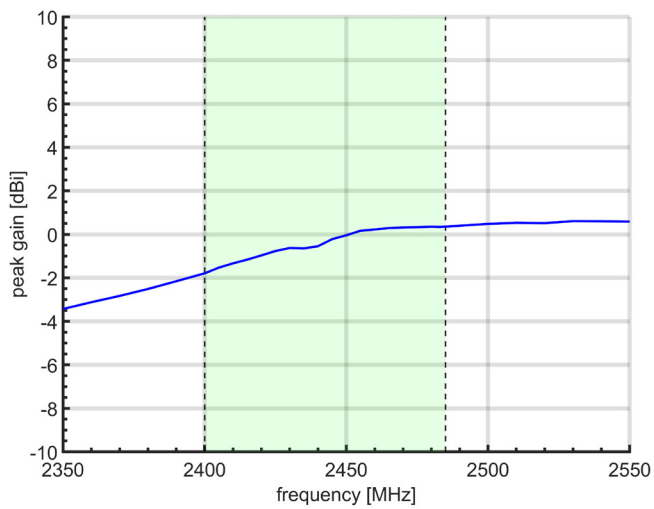


## UWB/BLE COMBO ANTENNA | PART NUMBER 903-001-002

### RADIATION PATTERN XY-PLANE - TOTAL & THETA POLARISATION (SIMULATED)

UWB/BLE Combo Antenna @ Eval-Board  
Realized Gain (E\_Total) @ XY-Plane

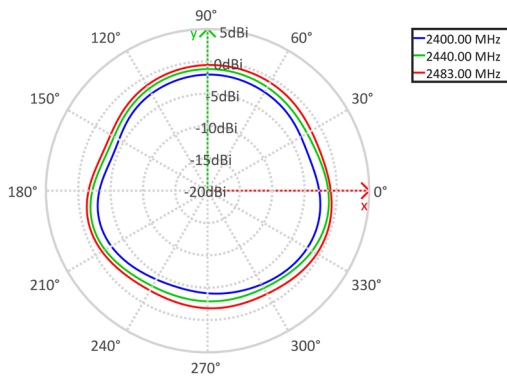


UWB/BLE Combo Antenna @ Eval-Board  
Realized Gain (E\_Theta) @ XY-Plane

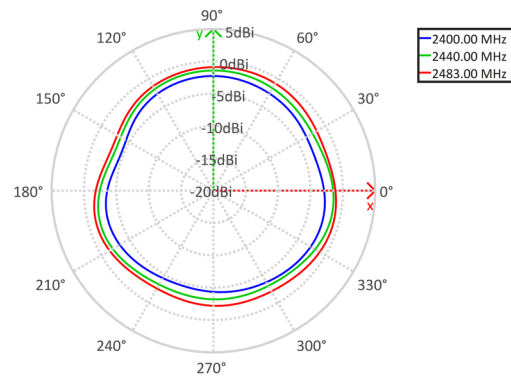


### RADIATION PATTERN XZ-PLANE - TOTAL & THETA POLARISATION (SIMULATED)

UWB/BLE Combo Antenna @ Eval-Board  
Realized Gain (E\_Total) @ XZ-Plane

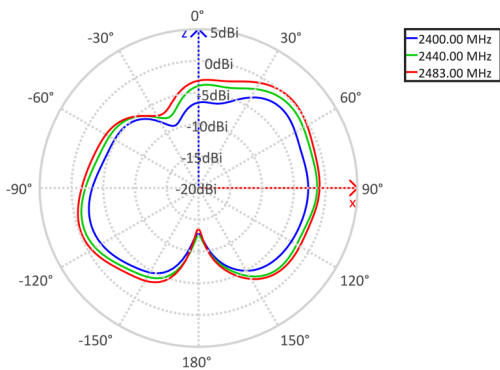


UWB/BLE Combo Antenna @ Eval-Board  
Realized Gain (E\_Theta) @ XZ-Plane

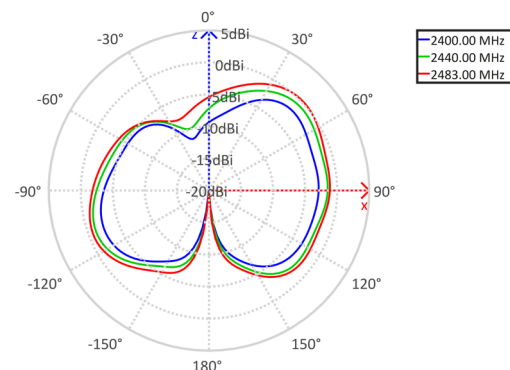



## UWB/BLE COMBO ANTENNA | PART NUMBER 903-001-002

### RADIATION PATTERN YZ-PLANE - TOTAL & THETA POLARISATION (SIMULATED)

UWB/BLE Combo Antenna @ Eval-Board  
Realized Gain (E\_Total) @ YZ-Plane

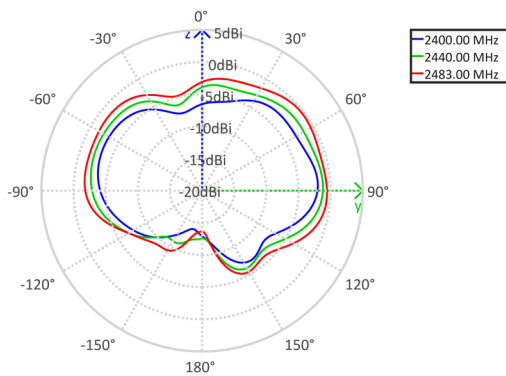


UWB/BLE Combo Antenna @ Eval-Board  
Realized Gain (E\_Theta) @ YZ-Plane


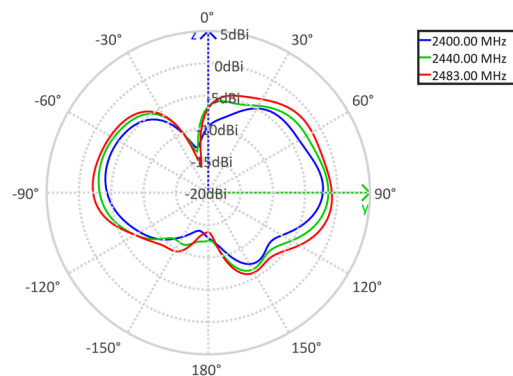


### RADIATION PATTERN XY-PLANE - TOTAL & THETA POLARISATION (SIMULATED)

UWB/BLE Combo Antenna @ Eval-Board  
Realized Gain (E\_Total) @ XY-Plane

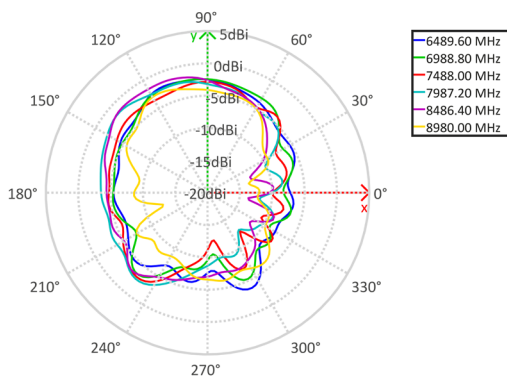


UWB/BLE Combo Antenna @ Eval-Board  
Realized Gain (E\_Theta) @ XY-Plane

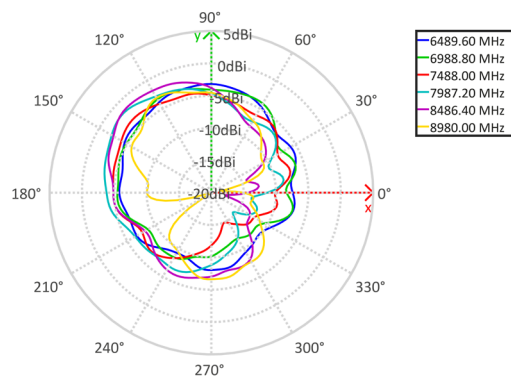



## UWB/BLE COMBO ANTENNA | PART NUMBER 903-001-002

### RADIATION PATTERN XZ-PLANE - TOTAL & THETA POLARISATION (SIMULATED)

UWB/BLE Combo Antenna @ Eval-Board  
Realized Gain (E\_Total) @ XZ-Plane

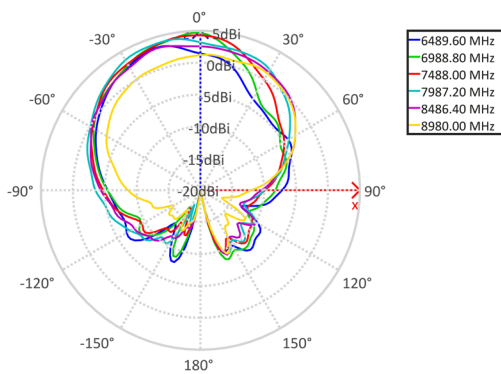


UWB/BLE Combo Antenna @ Eval-Board  
Realized Gain (E\_Theta) @ XZ-Plane


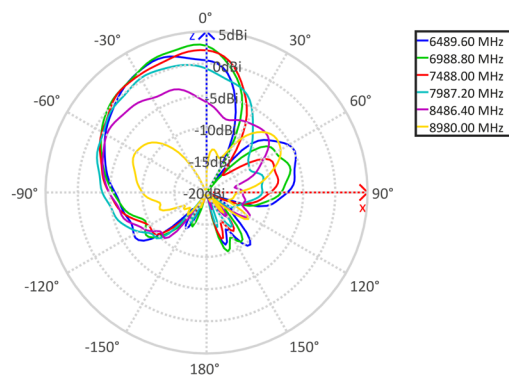


### RADIATION PATTERN YZ-PLANE - TOTAL & THETA POLARISATION (SIMULATED)

UWB/BLE Combo Antenna @ Eval-Board  
Realized Gain (E\_Total) @ YZ-Plane

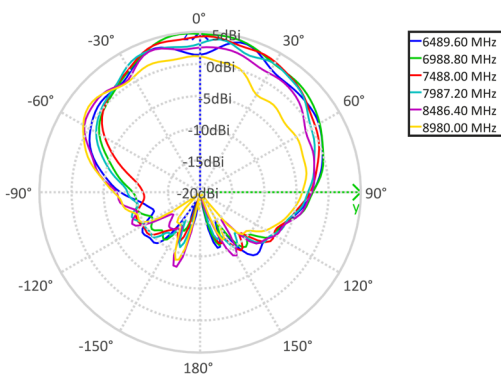


UWB/BLE Combo Antenna @ Eval-Board  
Realized Gain (E\_Theta) @ YZ-Plane

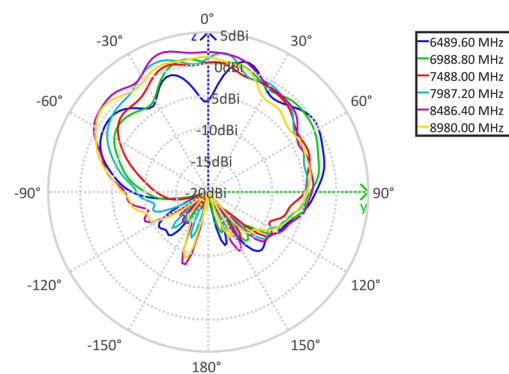


## UWB/BLE COMBO ANTENNA | PART NUMBER 903-001-002

### TRANSIENT GAIN, FIDELITY FACTOR AND CORRELATION PEAK DELAY - CHANNEL 5 (SIMULATED)

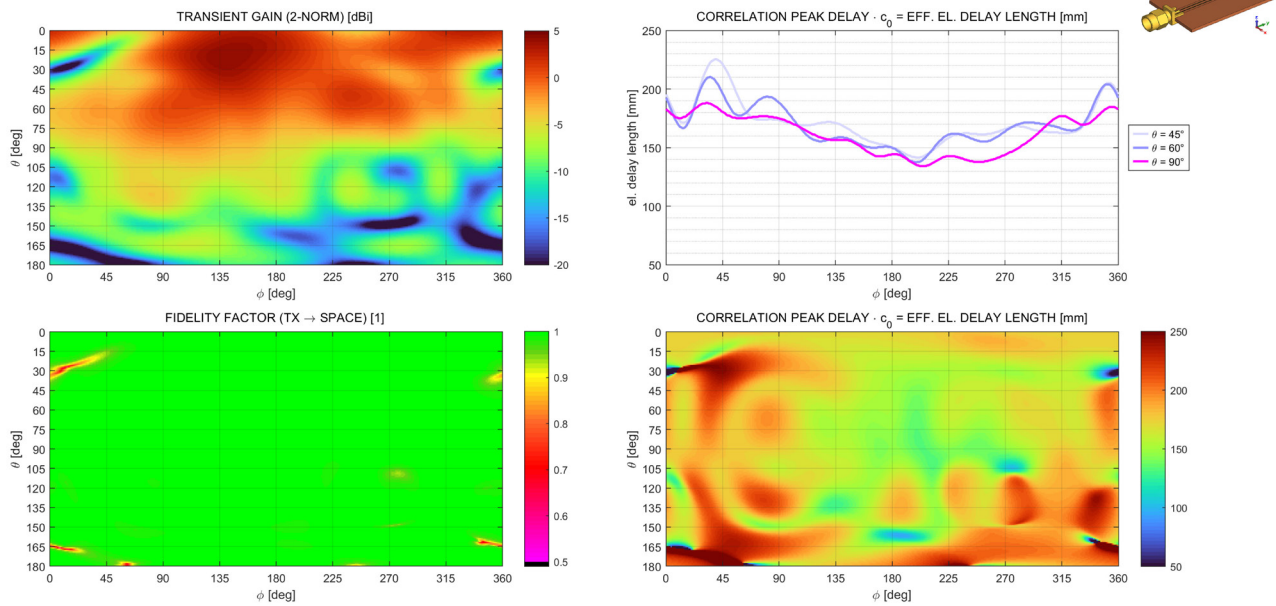


### TRANSIENT GAIN, FIDELITY FACTOR AND CORRELATION PEAK DELAY - CHANNEL 6 (SIMULATED)

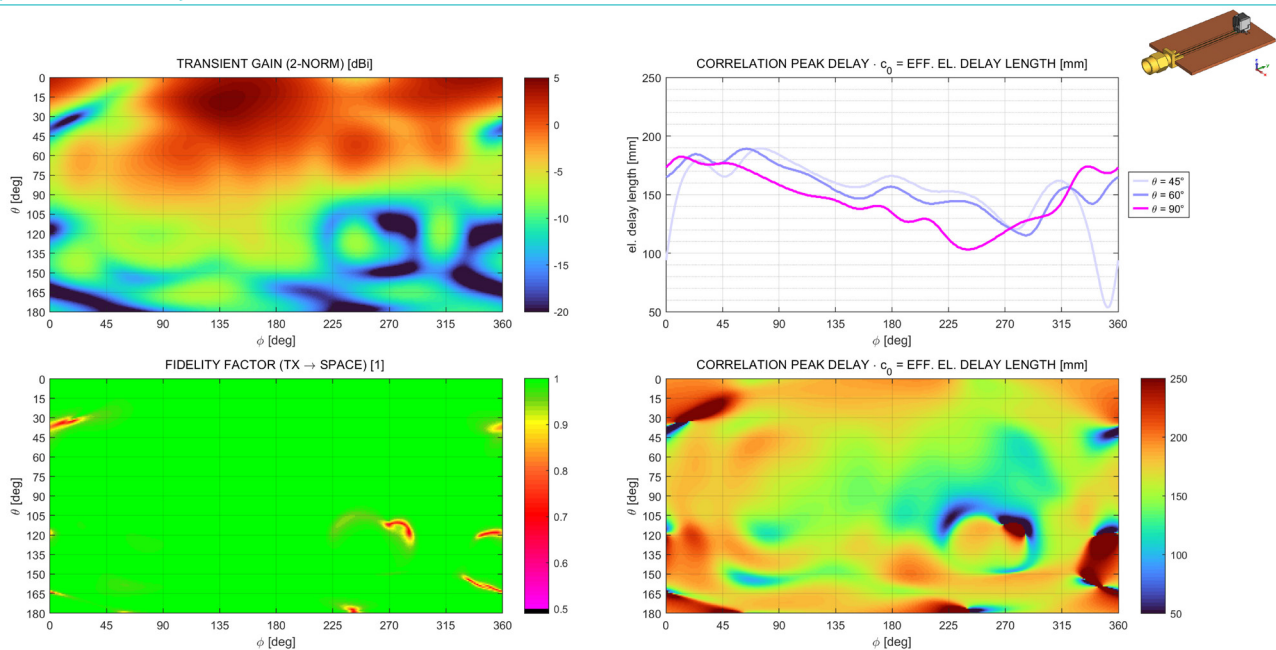




## UWB/BLE COMBO ANTENNA | PART NUMBER 903-001-002

### TRANSIENT GAIN, FIDELITY FACTOR AND CORRELATION PEAK DELAY - CHANNEL 8 (SIMULATED)

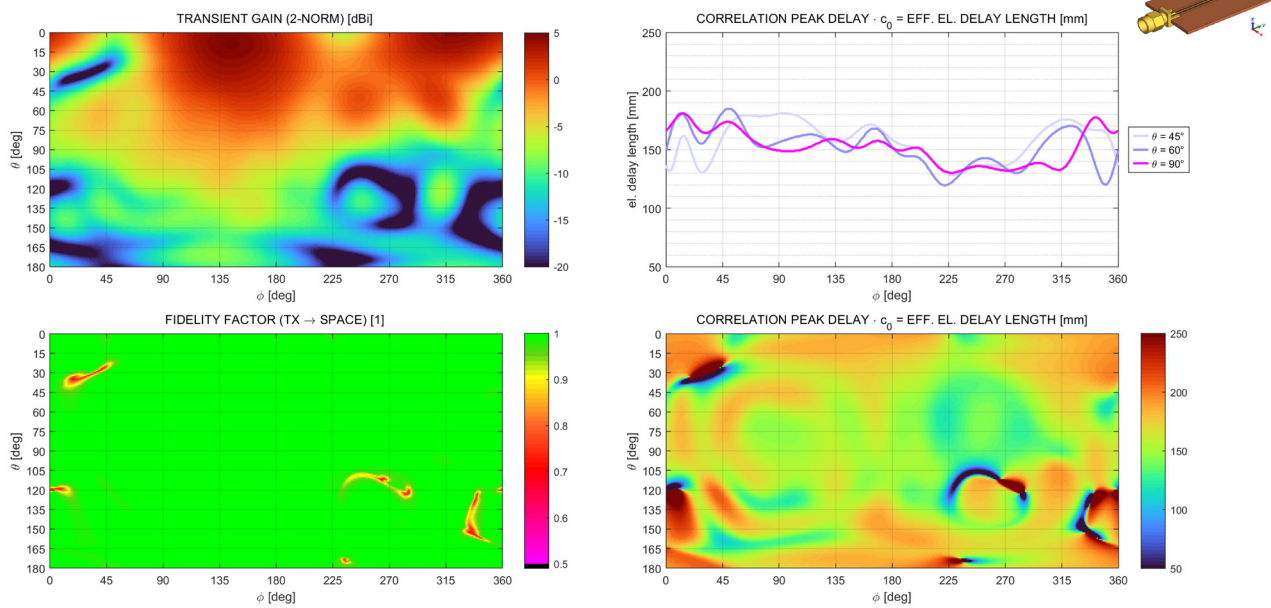

### TRANSIENT GAIN, FIDELITY FACTOR AND CORRELATION PEAK DELAY - CHANNEL 9 (SIMULATED)

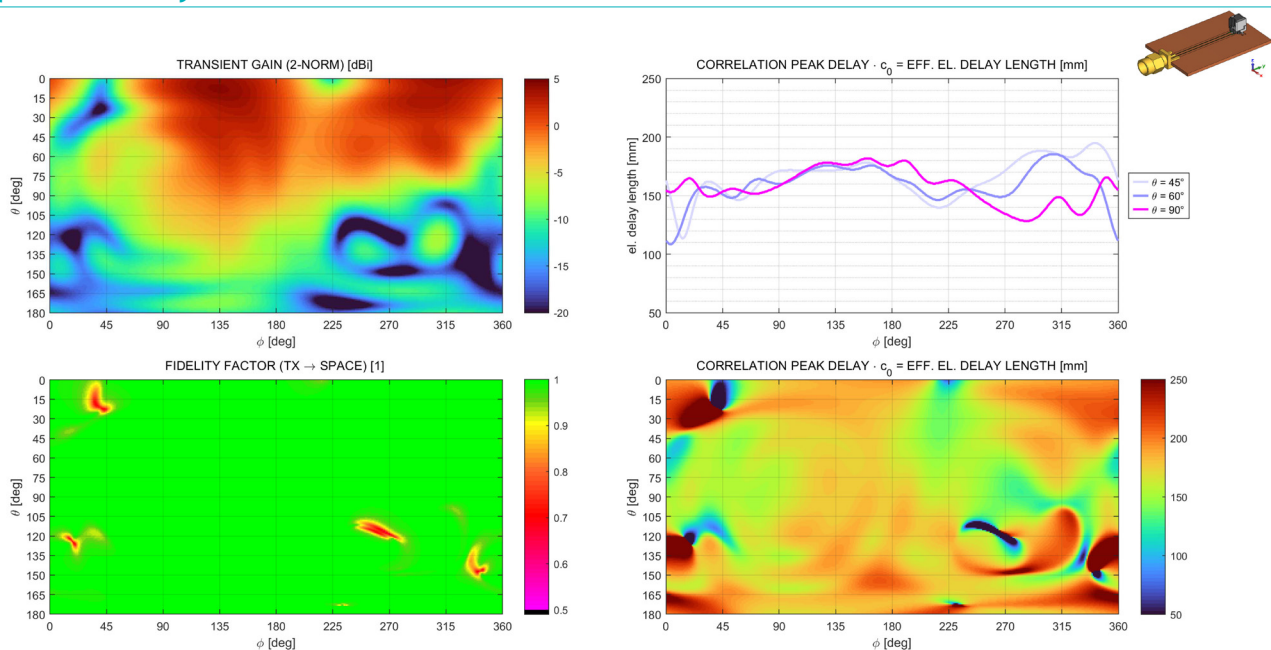

## UWB/BLE COMBO ANTENNA | PART NUMBER 903-001-002

### TRANSIENT GAIN

#### Definition

Broad-band and energy-based pendant to classical power-based antenna gain

→ Mean gain weighted with power spectral density of UWB reference pulse (acc. to IEEE standard 802.4.15).

$$g_{\theta}(\theta, \phi) = \frac{\int_{-\infty}^{+\infty} G_{\theta}(\omega, \theta, \phi) \cdot |S_{TX}(\omega)|^2 d\omega}{\int_{-\infty}^{+\infty} |S_{TX}(\omega)|^2 d\omega}$$

W. Wiesbeck, et. al.: Basic properties and design principles of UWB antennas. Proc. IEEE, Vol. 97, No. 2, Feb. 2009.

### FIDELITY FACTOR

#### Definition

Normalized cross-correlation of radiated pulse (electr. far-field of antenna) with transmit pulse in TD when antenna is stimulated with a UWB reference pulse (acc. to IEEE standard 802.4.15).

$$F_{\theta}(\theta, \phi) = \max_{\tau} \left\{ \frac{\left| \int_{-\infty}^{+\infty} e_{\theta}^{FF}(t + \tau, \theta, \phi) \cdot s_{TX}^*(t) dt \right|}{\sqrt{\int_{-\infty}^{+\infty} |e_{\theta}^{FF}(t, \theta, \phi)|^2 dt} \cdot \sqrt{\int_{-\infty}^{+\infty} |s_{TX}(t)|^2 dt}} \right\}$$

D.-H. Kwon: Effect of antenna gain and group delay variations on pulse-preserving capabilities of ultrawideband antennas. IEEE Trans. AP, Vol. 54., No. 8, Aug. 2006.

### DELAY

#### Definition

Time-lag  $\tau$  (available from above fidelity factor calculation) cross-correlation peak between radiated and stimulated pulse in TD. Electrical far-field of antenna can be referenced to any distance from phase-center. The delay is referenced to the antenna phase center (with zero radial distance).





**Hirschmann Car Communication GmbH** | *A Member of **USI*** | Stuttgarter Straße 45 – 51 | 72654 Neckartenzlingen | Germany  
Phone +49 7127 14-0 | Fax +49 7127 14-1060 | [info@hirschmann-car.com](mailto:info@hirschmann-car.com) | [www.hirschmann-car.com](http://www.hirschmann-car.com)

Hirschmann Car Communication and Hirschmann Car Communication (logo) are trademarks.  
Hirschmann, USI, LTE, GSM, UMTS, WiFi, Galileo, BeiDou, GLONASS, Bluetooth and FAKRA are trademarks.  
Other products and/or company names might be trademarks of their respective owners.

DISCLAIMER: While Hirschmann Car Communication (HCC) has made every reasonable effort to ensure the accuracy of the information in this data sheet, HCC gives no guarantee that it is error-free, nor does HCC make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. HCC reserves the right to make any adjustments to the information contained herein at any time without notice. HCC expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this data sheet are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult HCC for the latest dimensions and design specifications.

© 2025 Hirschmann Car Communication. All Rights Reserved. Published 10-2025